



The API Stretcher is a revolutionary rescue stretcher designed to provide safe handling of a casualty in an emergency rescue situation.

Despite its robust construction, the API Stretcher is lightweight and easy for one person to carry, it is ideal for casualty recovery in tight or difficult to reach situations. When deflated, the API Stretcher is compact and easily stowed on a vehicle, boat, helicopter or aircraft.

The API Stretcher can be inflated using an air cylinder, bellows or a compressor and takes only minutes to deploy.

Once a casualty is in place on the stretcher it can be easily carried, dragged or tobogganed over various terrains, including snow, sand, marsh and mudflats. It can also be lifted by helicopter, hauled in the horizontal or vertical plane.

The API can be supplied with an optional cover to provide all round protection from exposure. The cover has an inbuilt face visor and a two-way zip to provide quick access to the casualty.

FEATURES

- Ideal for casualty recovery in tight or of difficult to reach places
- Easily stowed on a vehicle, boat, helicopter or aircraft
- Can be carried, dragged or tobogganed over various terrains, including snow, sand, marsh and mudflats
- Can be lifted by a helicopter, hauled in the horizontal or vertical plane
- Supplied with an optional cover to provide all round protection from exposure
- Minimal training, servicing and maintenance costs

USED FOR

- Mountain & alpine rescue
- Mud rescue
- Casualty recovery
- Shallow water rescue

Community Design number: 001409809-0001 & 0002

🌐: www.mfc-international.com
☎: +44 (0) 1443 433 075
✉: sales@mfc-international.com

API -S-R2

MFC International
Naval Yard, Tonypandy,
Rhondda Cynon Taff, CF40 1JS




TECHNICAL DATA

API STRETCHER

Product code	WR0219
No. of persons	1
Length (cm)	215
Width (cm)	89
Height (cm)	42
Capacity (kg)	200
Air Requirements (ltr)	370
Pack size (cm)	70 x 45 x 30
Weight (kg)	11.3
Recommended regulator	8 bar

DETAIL DRAWING

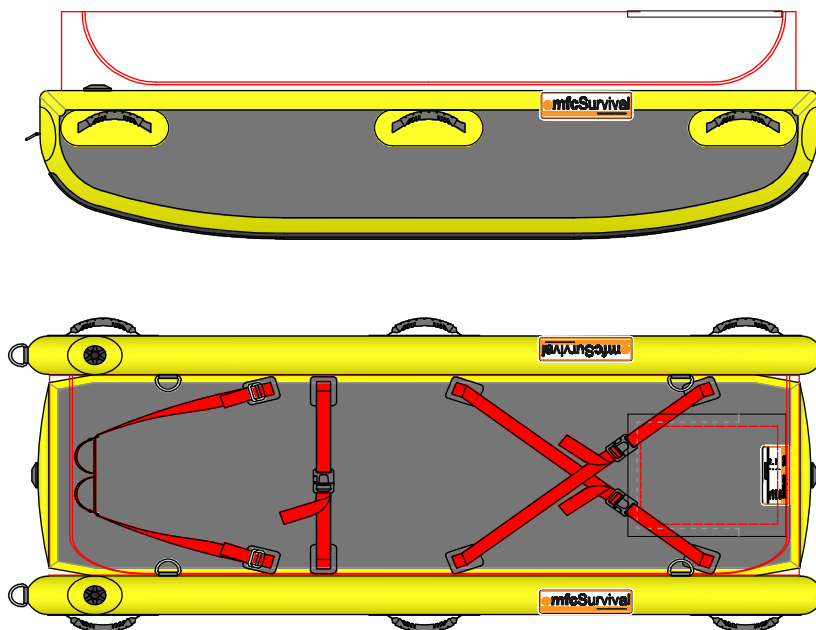

SUPPLIED WITH

- Leg & Chest restraining straps
- Foot securing straps
- Carrying handles (x6)
- Towing D-rings (x2)
- Removable cover with window
- 1m delivery hose (for use with 8 bar regulator)
- Repair kit
- Valise

OPTIONS


- Lifting sling
- 8 Bar regulator
- Foot or hand pump




OPTIONS FOR INFLATION



B.A. Cylinder
(By others)




8 bar Regulator
(RE0034)
Regulator &
hose kit
(RE0034/006)




1m Delivery Hose
(Supplied with stretcher:
HS-04-05-01-27-06)



Electric Inflator
GE1800 Standard
110v - 180057/001
230v - 180058



Bravo10 Foot
Pump
(180006)



Bravo 4 ALU R.E.D Hand
Pump
(180001)

