

The RS Series Rescue Sleds are flood water rescue craft for inshore crisis rescues and flooded urban and coastal areas.

- Lightweight and easily portable
- Easy to manoeuvre
- Can be paddled or pulled by hand
- Exceptionally Stable
- · Can be used in shallow water
- Open low stern makes casualty recovery easier
- Easily used by wheelchair users
- Individuals can sit on the floor surrounded by the inflated tubes, offering a comfortable and reassuring rescue environment

- Exceptionally tough and durable
- Rapid inflation and deployment
- Easily launched into the surf zone for sea rescue, with a raised bow for improved performance in waves
- Open stern for easy access and self-bailing
- Minimal training, servicing and maintenance costs

Used For:


- · Crisis rescue
- Flood Rescue
- River Rescue
- Flooded coastal and urban areas
- Casualty Recovery
- Shallow Water rescue

	RS3	RS5	RS6	RS10	RS15
Product Code	WR0001	WR0002	WR0169	WR0003	WR0005
No. Of Persons	3	5	6	10	15
O.A Length (cm)	256	331	397	400	500
O.A Width (cm)	117	117	117	190	231
O.A Height (cm)	40	40	40	56	77
Floor Thickness (cm)	12.5	12.5	12.5	12.5	12.5
Tube Diameter Bow/Stern (cm)	23/15	23/15	23/15	35/23	46/23
Max. Load (kg)	240	400	480	800	1200
Working Pressure	0.2	0.2	0.2	0.2	0.2
No. Of chambers	1+floor	1+floor	1+floor	4+floor	4+floor
Air Requirements (Itr)	530	670	710	2000	3800
Pack Size (cm)	88x35x30	88x35x30	88x35x30	88x55x35	90x70x52
Est. Weight (kg)	17	19.5	20.5	35	50
Recommended Regulator	8 Bar				



Rescue Sled

Standard Equipment

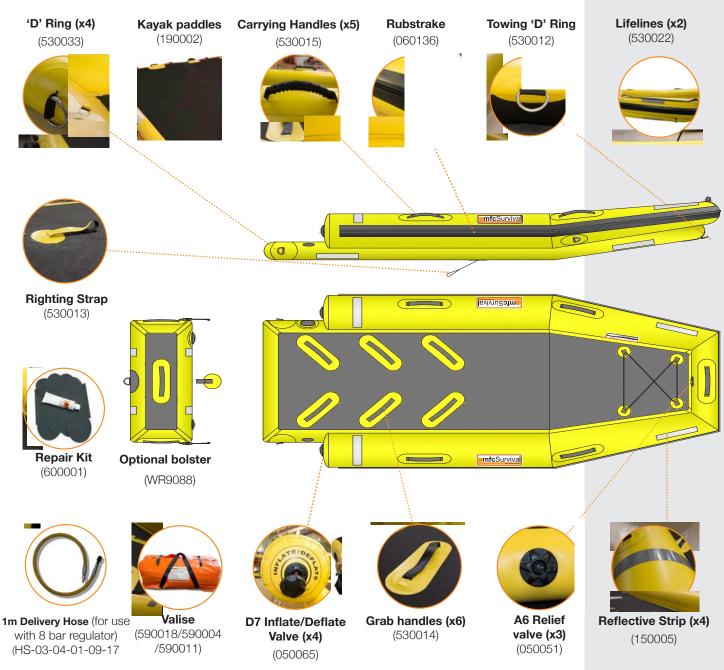

Optional Equipment





(dacron)

(530033)

Load Securing

Bravo10 Foot Pump (180006)





Bravo 4 ALU R.E.D Hand Pump (180001)



Paddle Retainer (530019)



8 bar Regulator (RE0034)

MFC International

Naval Yard Tonypandy Rhondda Cynon Taff CF40 1JS

:±44 (0) 1443 433 075 :::sales@mfc-international.com ::www.mfc-international.com

^{*} Standard and Optional Equipment (and quantities) can vary for each model of the Rescue Sled.

[©] MFC International